


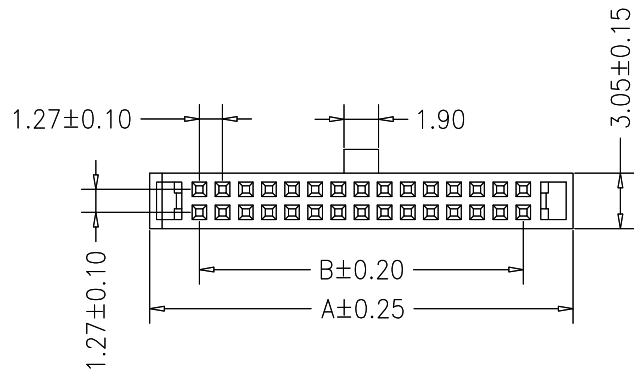
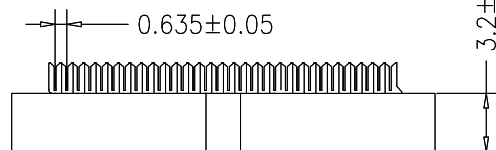



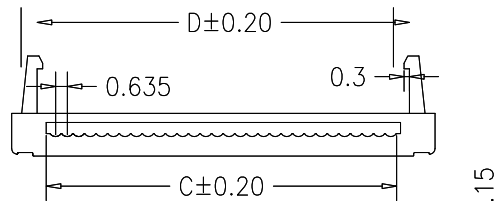

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Phosphor Bronze

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Pin	P/N	Pin	P/N
6	12130641001	36	12133641001
8	12130841001	38	12133841001
10	12131041001	40	12134041001
12	12131241001	42	12134241001
14	12131441001	44	12134441001
16	12131641001	46	12134641001
18	12131841001	48	12134841001
20	12132041001	50	12135041001
22	12132241001	52	12135241001
24	12132441001	54	12135441001
26	12132641001	56	12135641001
28	12132841001	58	12135841001
30	12133041001	60	12136041001
32	12133241001	62	12136241001
34	12133441001	64	12136441001

Dwg. No.		12D000001	
Projection			
Unit	mm	Scale	NOT TO SCALE
Type	IDC	Sheet	1/1

IDC FC XXPIN 1.27mm
Type Female Press

寰宇hnndo

P/N	1213XX41001			
Date	2025/8/1	Ver. NO	1.0	