



123456789

G
F
E
D
C
B
A


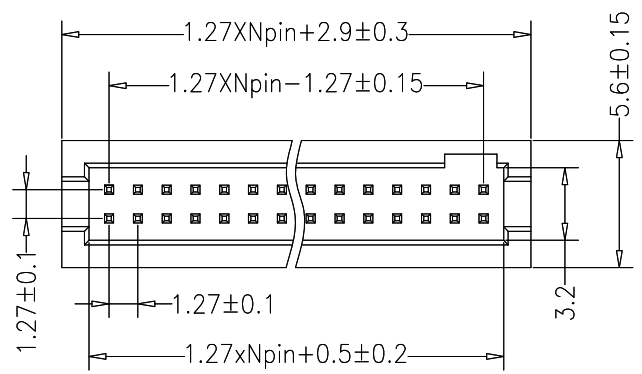


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

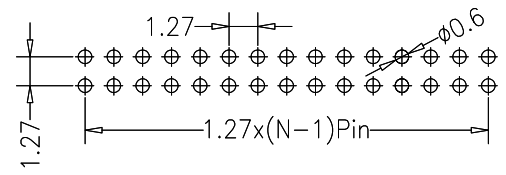

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

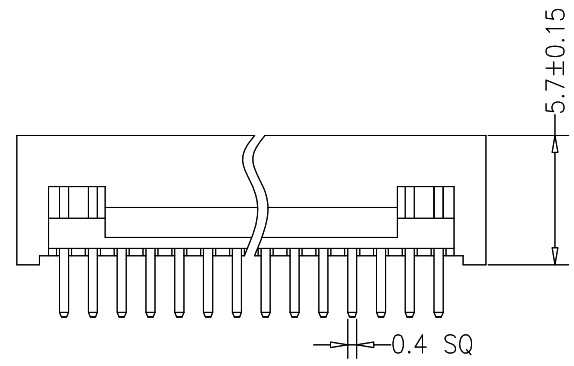

Pin	P/N	Pin	P/N
6	12110621001	36	12113621001
8	12110821001	38	12113821001
10	12111021001	40	12114021001
12	12111221001	42	12114221001
14	12111421001	44	12114421001
16	12111621001	46	12114621001
18	12111821001	48	12114821001
20	12112021001	50	12115021001
22	12112221001	52	12115221001
24	12112421001	54	12115421001
26	12112621001	56	12115621001
28	12112821001	58	12115821001
30	12113021001	60	12116021001
32	12113221001	62	12116221001
34	12113421001	64	12116421001

Dwg. No.		12D000003		IDC BoxHeader XXPIN 1.27mm Type Male 180° H5.7	寰宇hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1211XX21001		
Type	IDC	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0

123456789