

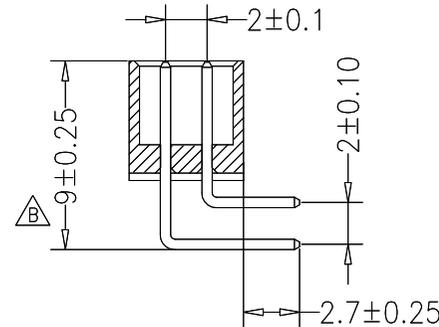
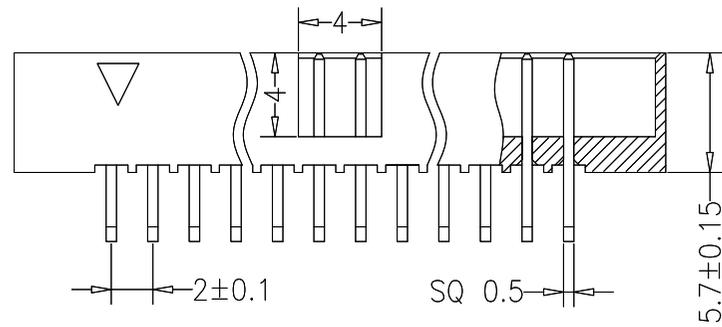


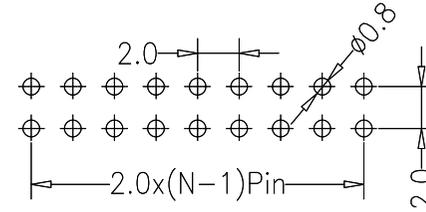

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

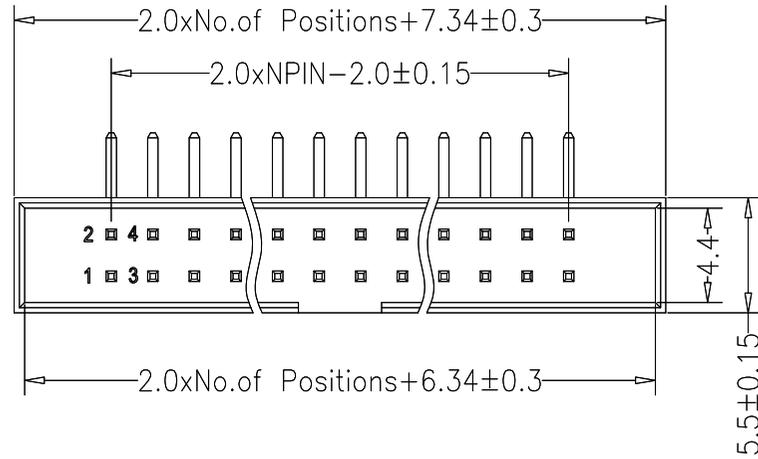

SPECIFICATIONS
 Rated Current: 1.5AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 400V AC/DC
 Insulation Resistance: 800MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Pin	P/N	Pin	P/N
6	12110632001	36	12113632001
8	12110832001	38	12113832001
10	12111032001	40	12114032001
12	12111232001	42	12114232001
14	12111432001	44	12114432001
16	12111632001	46	12114632001
18	12111832001	48	12114832001
20	12112032001	50	12115032001
22	12112232001	52	12115232001
24	12112432001	54	12115432001
26	12112632001	56	12115632001
28	12112832001	58	12115832001
30	12113032001	60	12116032001
32	12113232001	62	12116232001
34	12113432001	64	12116432001

Dwg. No.		12D000012		IDC BoxHeader XXPIN 2.00mm Type Male 90°				
Projection								
Unit	mm	Scale	NOT TO SCALE	P/N	1211XX32001			
Type	IDC	Sheet	1/1	Date	2025/8/1	Ver. NO	1.0	