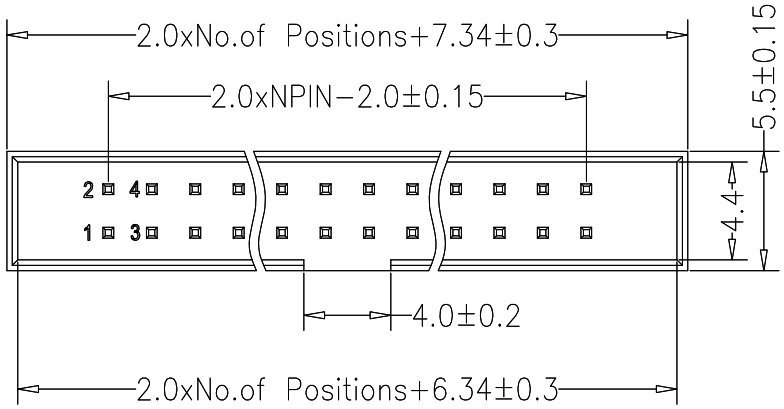

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

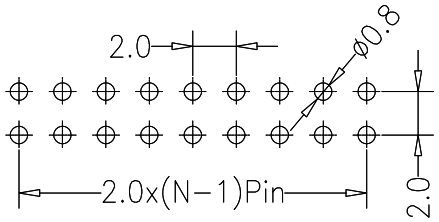

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:400V AC/DC
Insulation Resistance:800MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

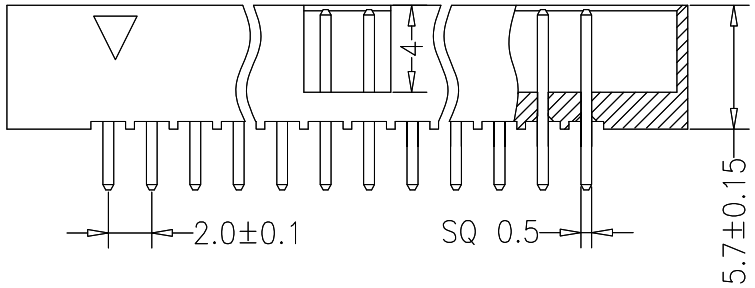



Pin	P/N	Pin	P/N
6	12110622001	36	12113622001
8	12110822001	38	12113822001
10	12111022001	40	12114022001
12	12111222001	42	12114222001
14	12111422001	44	12114422001
16	12111622001	46	12114622001
18	12111822001	48	12114822001
20	12112022001	50	12115022001
22	12112222001	52	12115222001
24	12112422001	54	12115422001
26	12112622001	56	12115622001
28	12112822001	58	12115822001
30	12113022001	60	12116022001
32	12113222001	62	12116222001
34	12113422001	64	12116422001

Dwg. No.		12D000011		IDC BoxHeader XXPIN 2.00mm Type Male 180°	寰宇hnndo		
Projection					P/N	1211XX22001	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver.NO 1.0
Type	IDC	Sheet	1/1				