


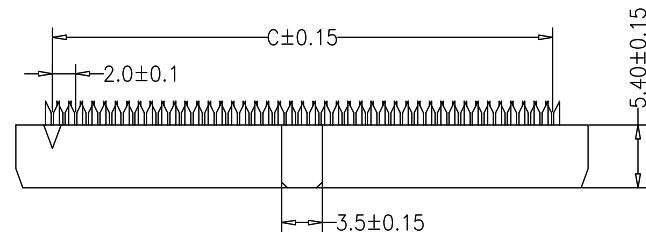




Strain Relife

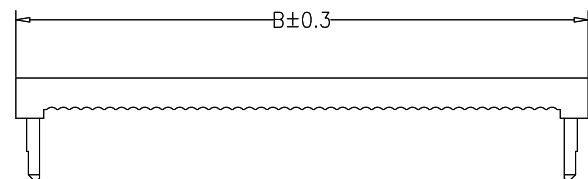

W=With Bump



N=Without Bump

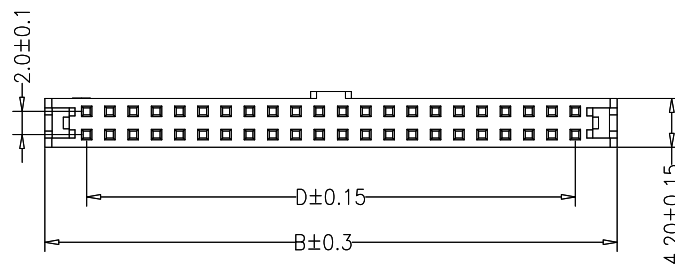

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Pin	P/N	Pin	P/N
6	12150642001	36	12153642001
8	12150842001	38	12153842001
10	12151042001	40	12154042001
12	12151242001	42	12154242001
14	12151442001	44	12154442001
16	12151642001	46	12154642001
18	12151842001	48	12154842001
20	12152042001	50	12155042001
22	12152242001	52	12155242001
24	12152442001	54	12155442001
26	12152642001	56	12155642001
28	12152842001	58	12155842001
30	12153042001	60	12156042001
32	12153242001	62	12156242001
34	12153442001	64	12156442001

Dwg. No.		12D000009		IDC FC ThreePiece XXPIN 2.00mm Type Female Press	寰宇hnnndo			
Projection					P/N		1215XX42001	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	IDC	Sheet	1/1					