




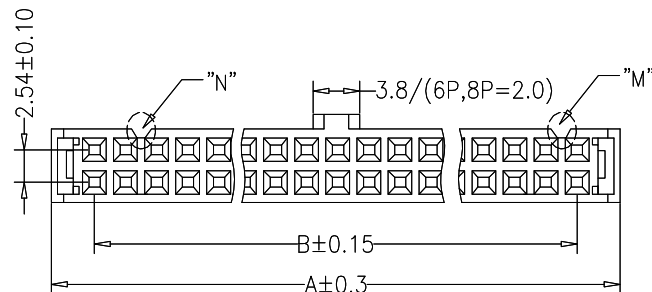
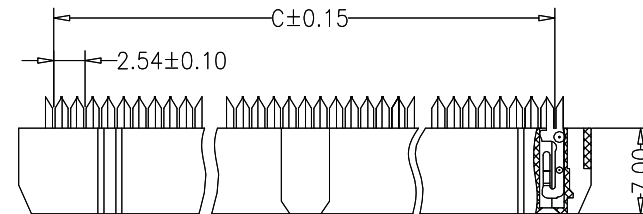


Strain relief P/N:G5315-XXDB01

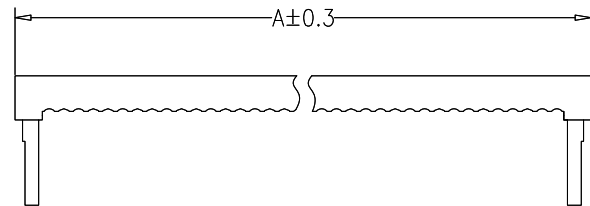

W=With Bump



N=Without Bump



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Pin	P/N	Pin	P/N
6	12150643001	36	12153643001
8	12150843001	38	12153843001
10	12151043001	40	12154043001
12	12151243001	42	12154243001
14	12151443001	44	12154443001
16	12151643001	46	12154643001
18	12151843001	48	12154843001
20	12152043001	50	12155043001
22	12152243001	52	12155243001
24	12152443001	54	12155443001
26	12152643001	56	12155643001
28	12152843001	58	12155843001
30	12153043001	60	12156043001
32	12153243001	62	12156243001
34	12153443001	64	12156443001

Dwg. No.		12D000020		IDC FC ThreePiece XXPIN 2.54mm Type Female Press	寰宇hnnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1215XX43001		
Type	IDC	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0