





**HSF RoHS**

**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

Pin	P/N	Pin	P/N
6	12170643001	36	12173643001
8	12170843001	38	12173843001
10	12171043001	40	12174043001
12	12171243001	42	12174243001
14	12171443001	44	12174443001
16	12171643001	46	12174643001
18	12171843001	48	12174843001
20	12172043001	50	12175043001
22	12172243001	52	12175243001
24	12172443001	54	12175443001
26	12172643001	56	12175643001
28	12172843001	58	12175843001
30	12173043001	60	12176043001
32	12173243001	62	12176243001
34	12173443001	64	12176443001

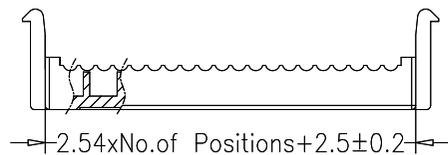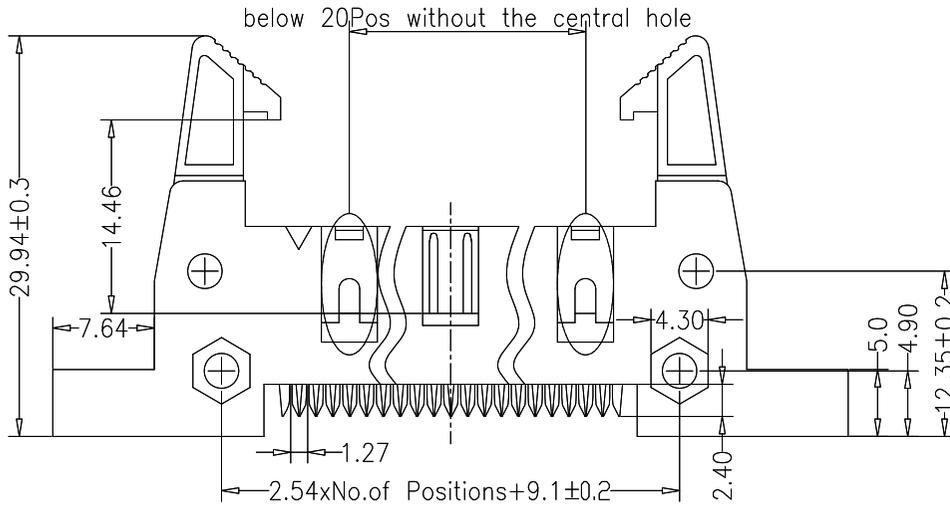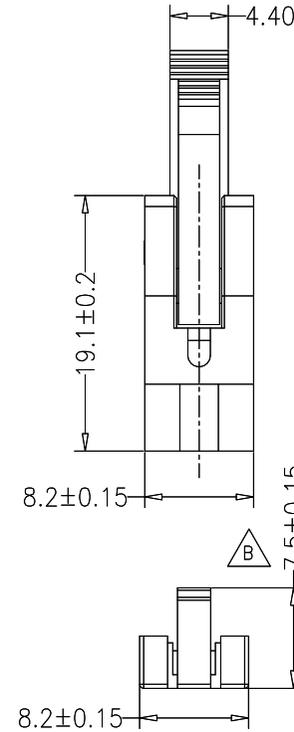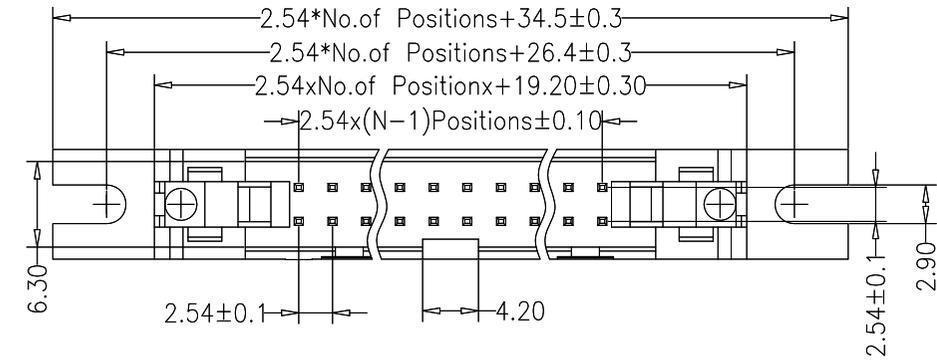

Dwg. No.		12D000029	
Projection			
Unit	mm	Scale	NOT TO SCALE
Type	IDC	Sheet	1/1

IDC EjectorHeader  
 XXPIN 2.54mm Type Male  
 Press

**震导hnndo**

P/N	1217XX43001		
Date	2025/8/1	Ver. NO	1.0