

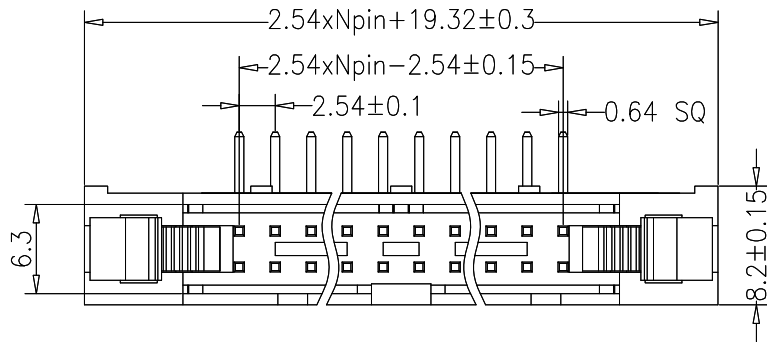
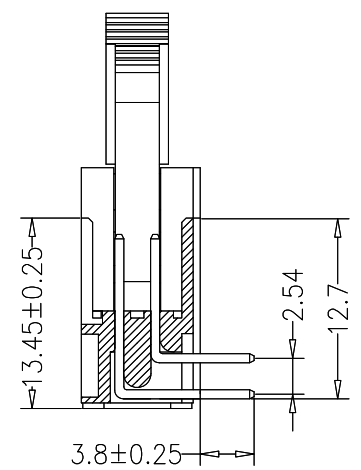
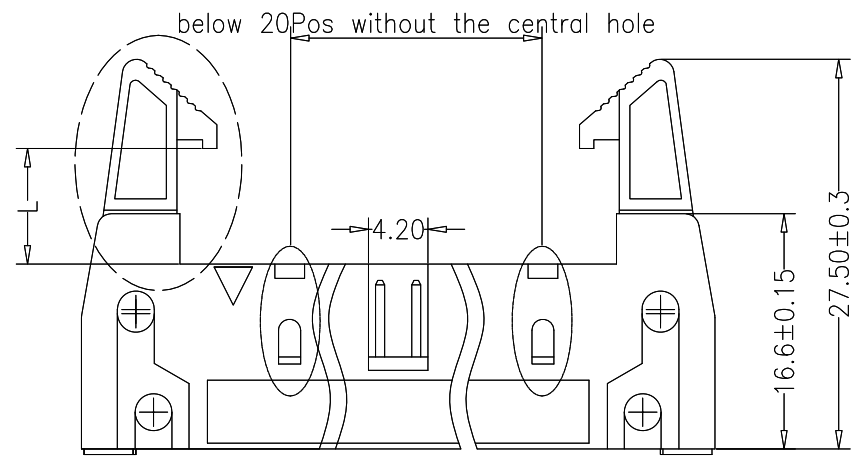





Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

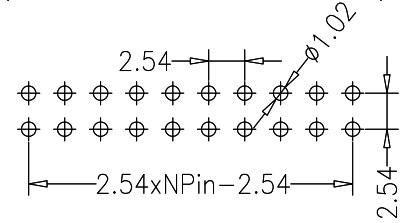

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Pin	P/N	Pin	P/N
6	12120633001	36	12123633001
8	12120833001	38	12123833001
10	12121033001	40	12124033001
12	12121233001	42	12124233001
14	12121433001	44	12124433001
16	12121633001	46	12124633001
18	12121833001	48	12124833001
20	12122033001	50	12125033001
22	12122233001	52	12125233001
24	12122433001	54	12125433001
26	12122633001	56	12125633001
28	12122833001	58	12125833001
30	12123033001	60	12126033001
32	12123233001	62	12126233001
34	12123433001	64	12126433001

Dwg. No.		12D000026	
Projection			
Unit	mm	Scale	NOT TO SCALE
Type	IDC	Sheet	1/1

IDC EjectorHeader XXPIN 2.54mm Type Male 90°	寰宇hnn do			
	P/N	1212XX33001		
	Date	2025/8/1	Ver. NO	1.0