




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

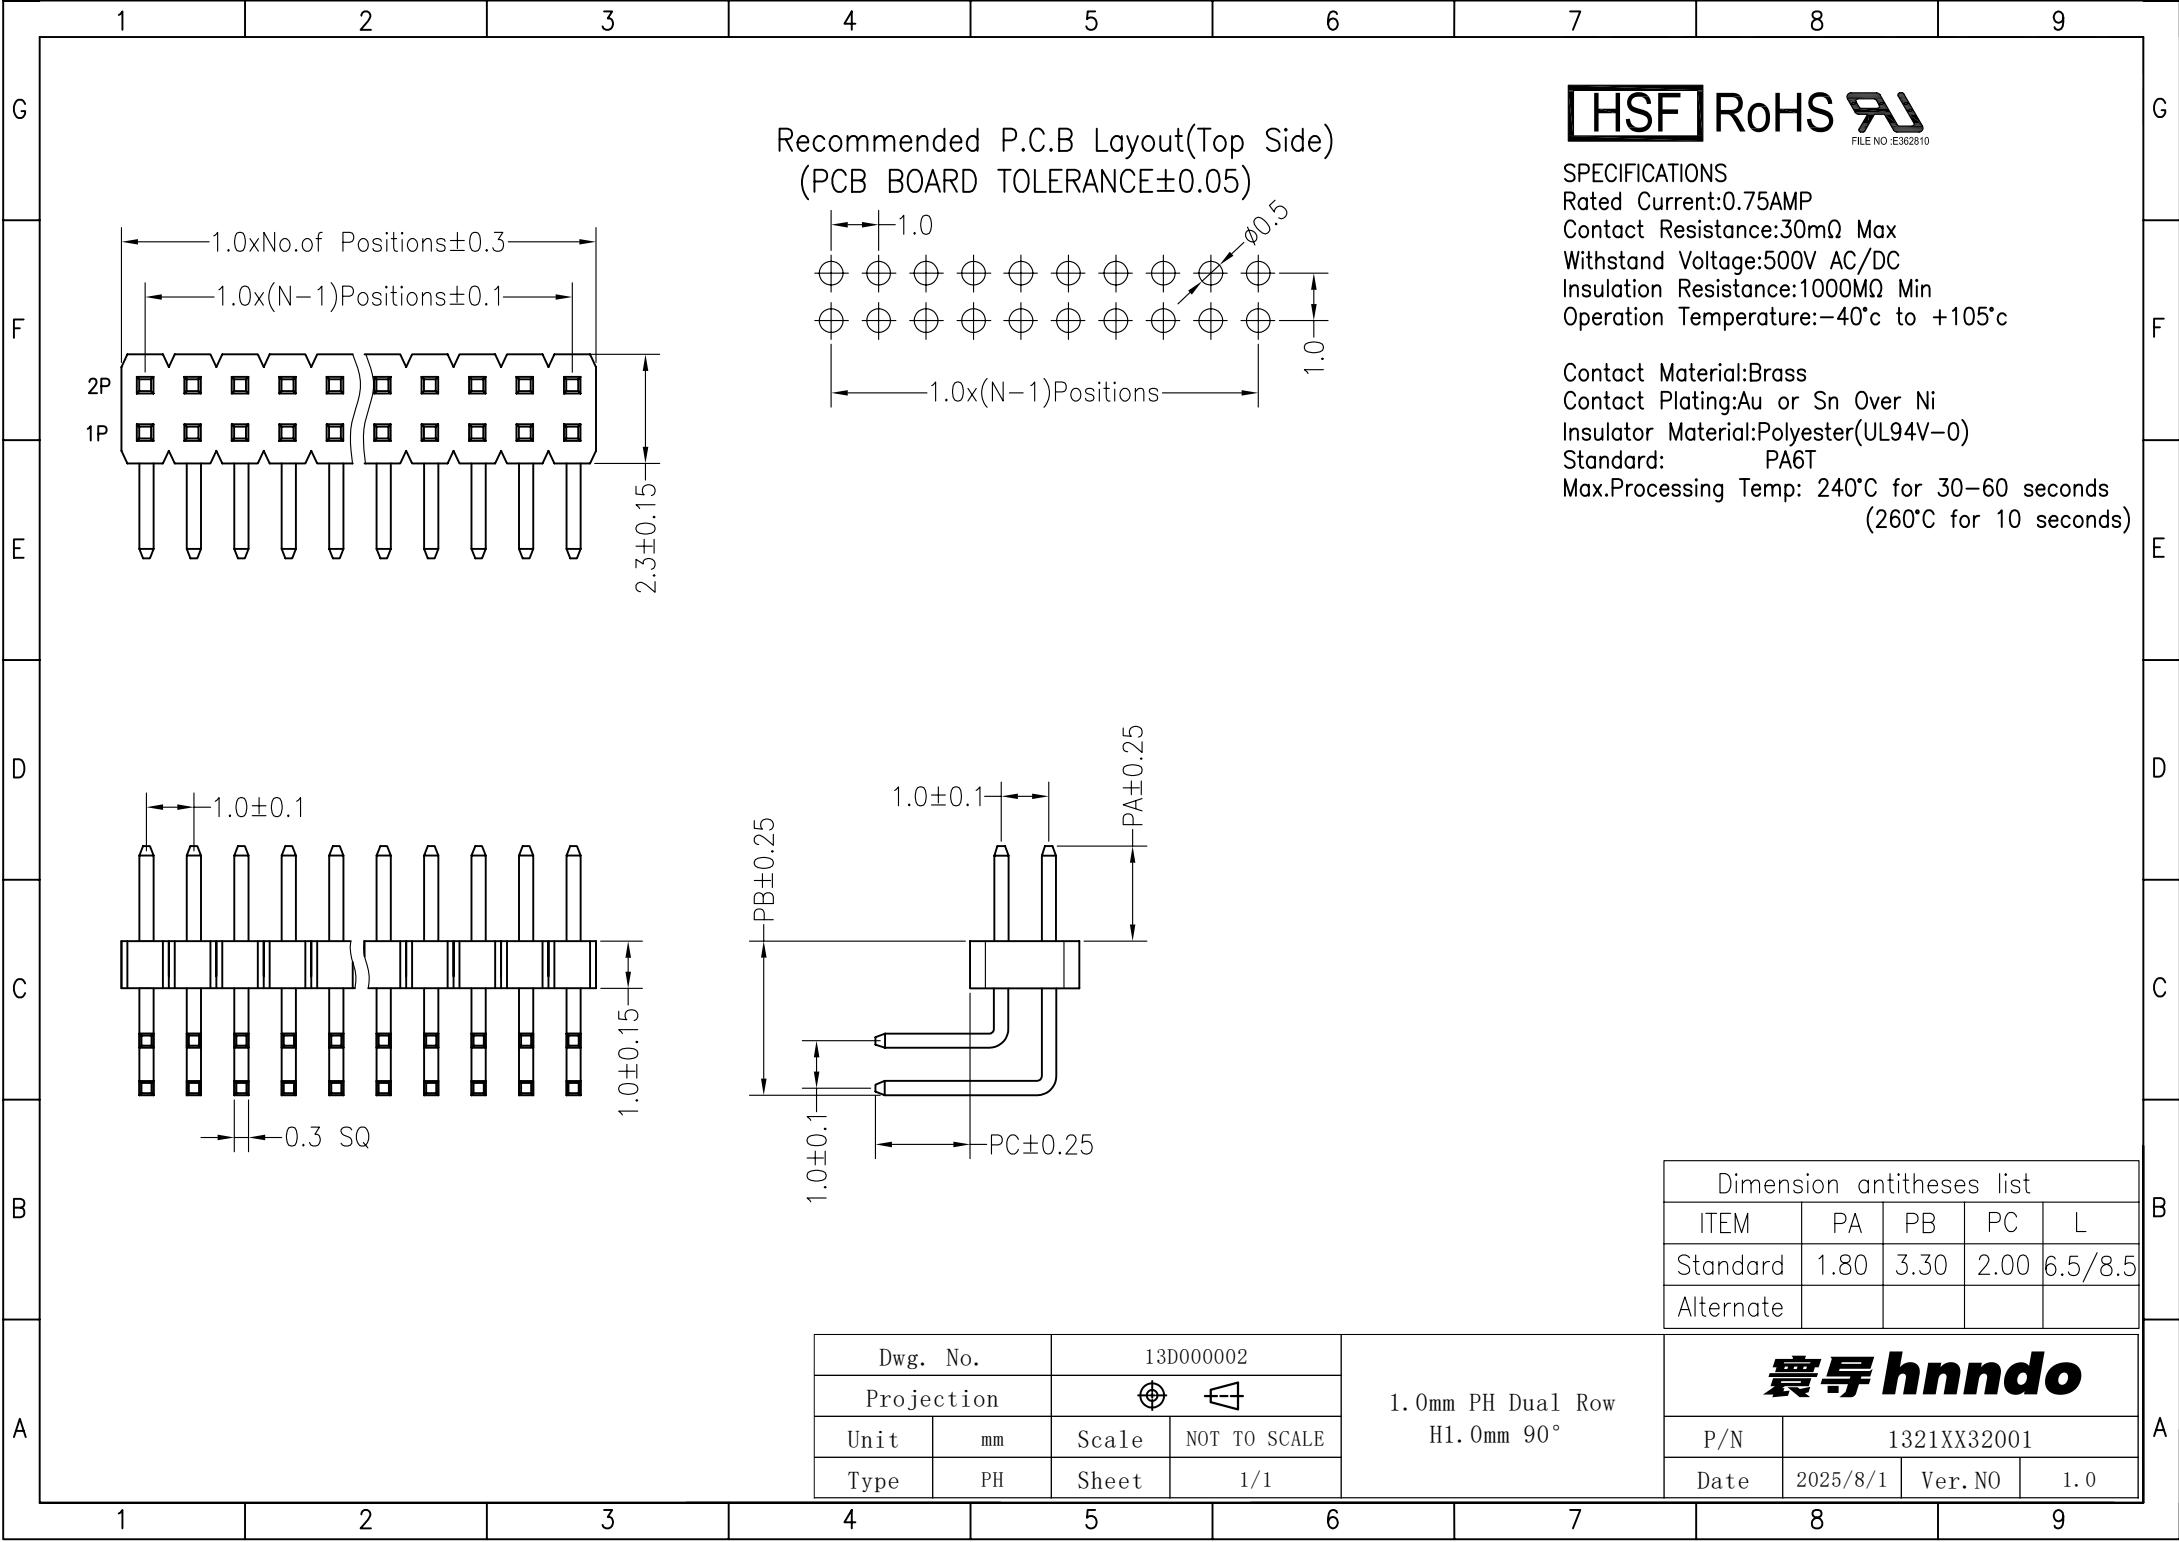

SPECIFICATIONS
Rated Current:0.75AMP
Contact Resistance:30mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 240°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	1.80	3.30	2.00	6.5/8.5
Alternate				

Dwg. No.		13D000002		1.0mm PH Dual Row H1.0mm 90°	寰宇 <i>hnndo</i>			
Projection					P/N		1321XX32001	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	PH	Sheet	1/1					