
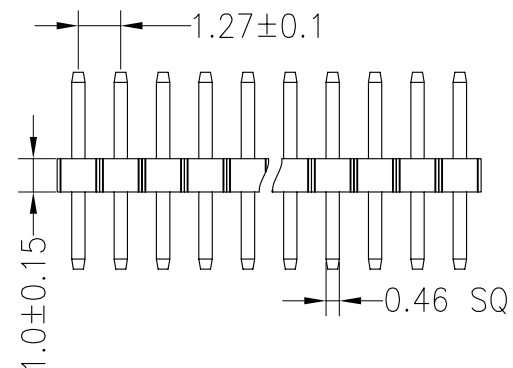


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

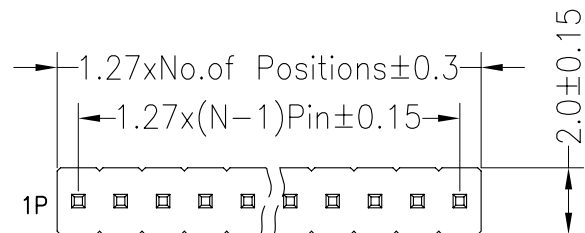

SPECIFICATIONS
 Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Dimension antitheses list			
ITEM	PC	PA	L
Standard	2.30	3.90	7.20
Alternate			

Dwg. No.		13D000006		1.27mm PH H1.0mm 1xNPin DIP	寰宇hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1311XX23001		
Type	PH	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0