


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

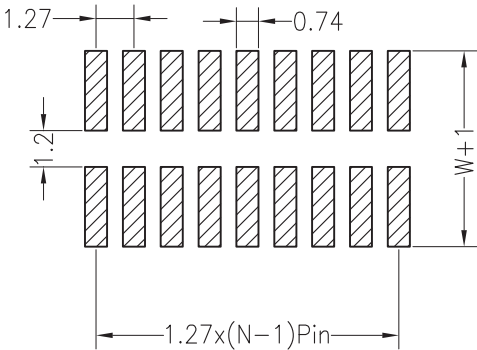

SPECIFICATIONS
 Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	4.00	1.50	5.30	7.20
Alternate				

Dwg. No.		13D000010	
Projection			
Unit	mm	Scale	NOT TO SCALE
Type	PH	Sheet	1/1

1.27mm PH 2xNPin
2+H1.0mm SMT

寰宇 hnndo			
P/N	1321XX13001		
Date	2025/8/1	Ver. NO	1.0