

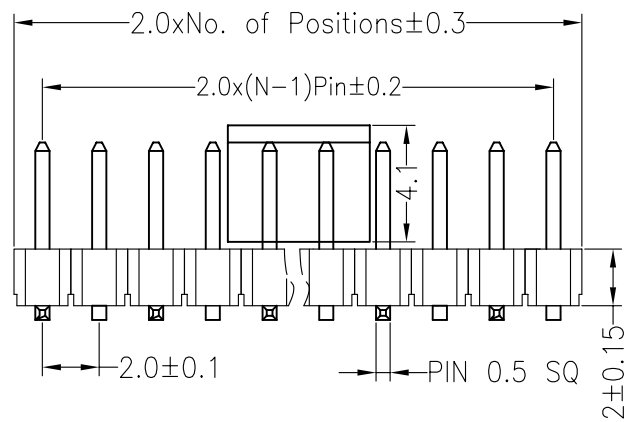
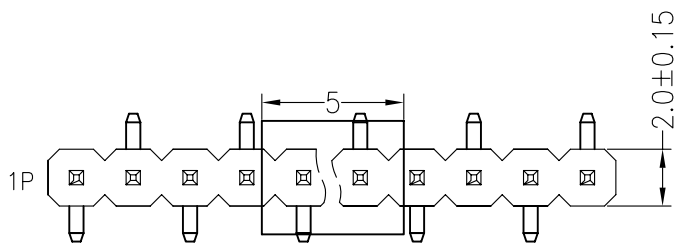
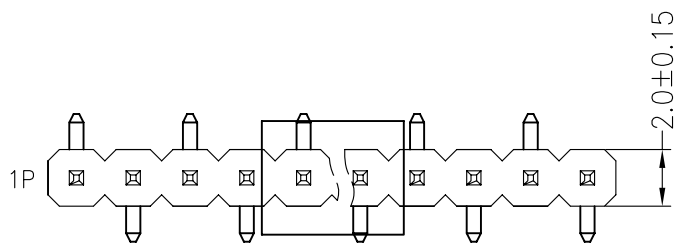



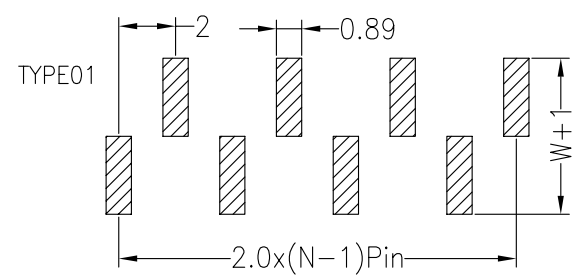

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

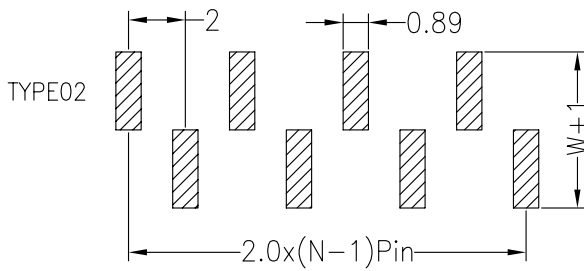

SPECIFICATIONS
 Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	3.80	2.50	4.50	8.00
Alternate				

Dwg. No.		13D000013	
Projection			
Unit	mm	Scale	NOT TO SCALE
Type	PH	Sheet	1/1

2.0mm PH 1xNPin H2.0mm
SMT

寰宇 hnndo

P/N	1311XX14001		
Date	2025/8/1	Ver. NO	1.0