

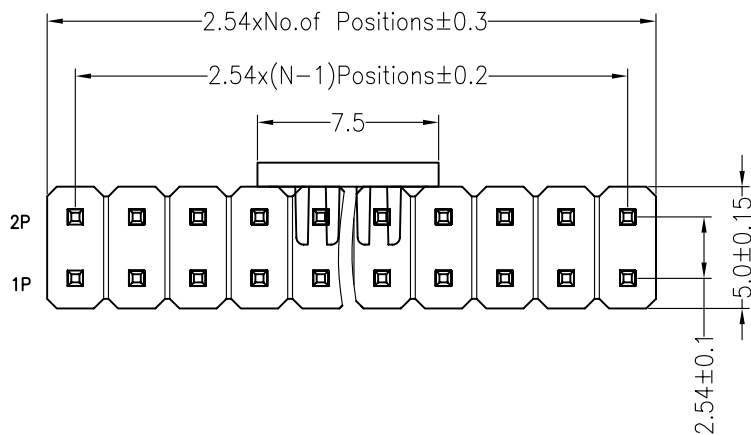
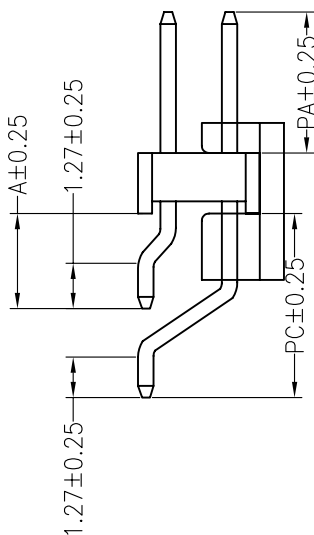


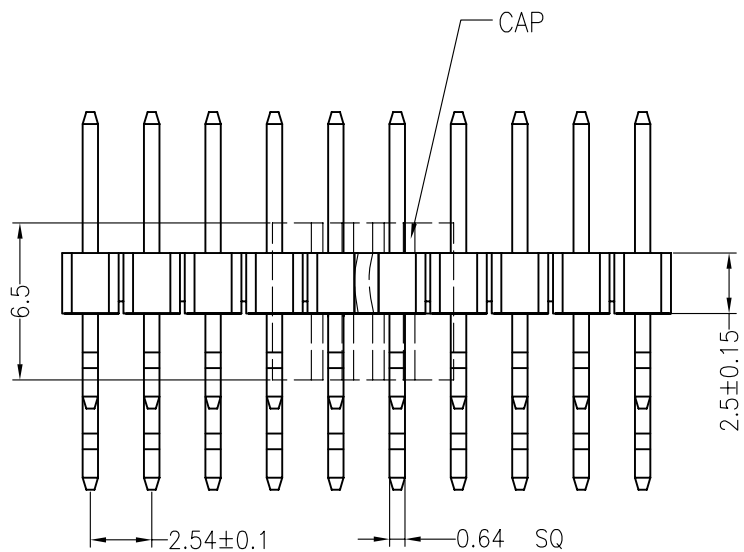

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

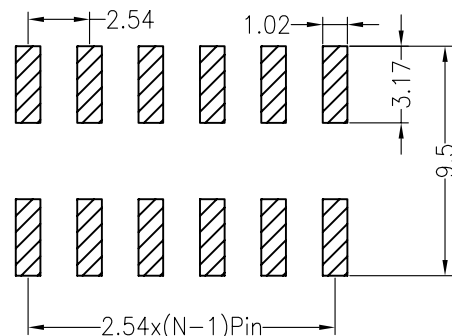

SPECIFICATIONS
 Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Dimension antitheses list				
ITEM	PA	A	PC	L
Standard	6.00	3.94	8.50	12.5/19.0
Alternate				

Dwg. No.		13D000026		2.54mm PH 2xNPin H2.5mm 90° SMT	寰宇 <i>hnndo</i>			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1321XX45001		
Type	PH	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0